


Barbed Wire Making Machine



Automatic Barbed Wire Making Machine

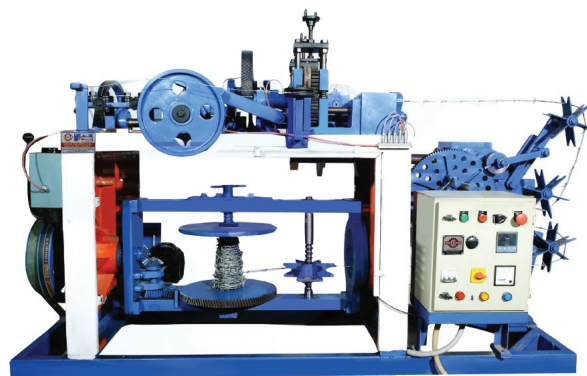

- ▶ The machine is extremely rigid to withstand overloading.
- ▶ The High Speed Winding Unit revolves at approximately 180 RPM.
- ▶ It produces both 'GLIDDEN' and 'IOWA' double ply Barbed Wire with 2 point, 4 point consecutively.

NOTE: The machine can also produce barbed wire from 14 or 15 or 16 or 17 Gauge wire (2.0 to 1.4 mm diameter) at the cost of production capacity.

Model	PBWM-1
Strand and Point Wire	12/12 SWG* (i.e. 2.64 mm diameter)
Strand and Point Wire	Hard Bright, fully hot dip galvanized wire with under 30 to 55 Kg. F / mm
Production Capacity	500 Kgs / 8 Hrs. shift for 12/12 SWG wire with 140 to 160 barbs / min. Capacity to coil bundles of 400 meters (bundle size 16" dia. x 10" width. weight: 40/50 Kgs)
Barb Spacing	Standard: 3" & 4" pitch (optional: 5" / 6" / etc. with change parts)
Motor	5 HP / 960 RPM
Net / Gross Weight	1100 / 1400 Kgs.
Shipping Dimensions	2550 x 1150 x 1250 mm
Shipping Volume	3.70 m ³

'U' Nail / Fence Staple Making Machine



Model	P UNM-1
Type	DOUBLE Stroke
Wire Diameter (SWG)	18 to 6 Gauge
Wire Diameter	1.2 to 4.8 mm
Length of 'U' Nail	1/2" to 1-1/2" (15 to 40 mm)
Distance Between ends	6 to 12 mm
Production Capacity	200 to 250 'U' Nails per Minute
Motor	3.0 HP
Net / Gross Weight	325 / 500 kilos
Approx. Dimensions	2.00 x 0.90 x 1.10 m
Shipping Volume	2.00 m ³