

# Hand Spot Welding



MODEL	PHSW-16
Output KVA	16
Input primary voltage (AC)	415V(2-phase)
Rated frequency (HZS)	50/60
No-load voltage (Max OCV) (VOLT)	9
Primary line current (Max) (AMP)	55
Dimensions (approx) (H*L*W) (MM)	625*510*800
Weight (without gun and cable) (approx Kg)	104
Gun & cable weight (approx Kg)	9.5
Output work cable with water cooling length (Mtr)	3
Earth cable with water cable length (Mtr)	3
Cooling	Natural air
Insulation Class	A
time control (KA)	Solid-state electronic
output current selection (Way)	8 Step
Time control (Step)	Cycle/second

IDEAL FOR ALMIRAH FABRICATION UNITS

# Scaffolding Welding Automation

## Automatic Ledger Welder




Automatic Base jack/ Ujack welding machine is used to weld base plate with pipe without making any joint between them



Item	Supply	Phase	Frequency	Speed	Motor drive	Motor	Torch Clamping	Length Adjustable	Dimesions
Unit	V	Nos.	Hz.	RPM	TYPE	TYPE	TYPE	mm	LxWxH
Ledger welding Double Side	220±10%	SINGLE	50/60	2 to 10	Sohal 78-C	DC	PNEUMATIC	Up to 1000	5.4x2.5x4.7 (Foot)

## Scaffolding Welding Fixture

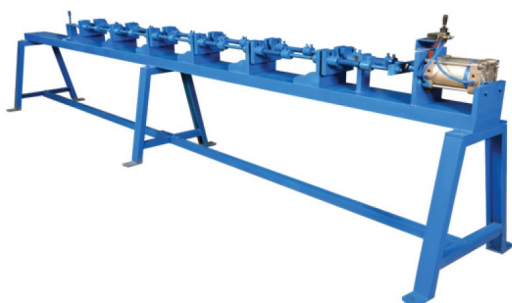

Scaffolding Cuplock/Ringlock tagging fixture comes with the provision of tagging six cups/rings in one time in center line.

\*For Other Scaffolding Machines Please Check Our Threading Machines, Drill Machines & Cutting Machine Sections.