


C Frame (Open Throat) Hydraulic Press

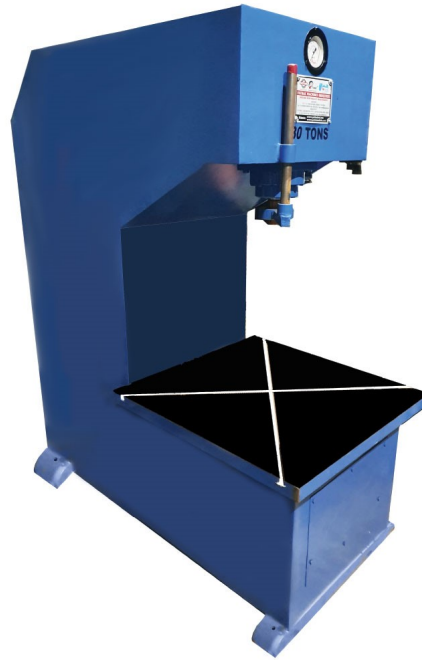

SPECIFICATION

MODEL		OTP1	OTP2	OTP3	OTP5	OTP7	OTP10	OTP15
SPECIFICATIONS		10 Tons	20 Tons	30 Tons	50 Tons	75 Tons<	100 Tons	150 Tons
Dia of Crank Shaft	mm	80	90	100	115	125<	150	175
Adjustability of Stroke	mm	50	76	76	100	100<	125	150
Punch Bore in Ram	mm	25	31	31	38	38<	45	50
Width of Bed	mm	300	375	440	525	600<	650	700
Length of Bed	mm	450	550	615	700	800<	900	1000
Gear Dia	mm	450	525	600	650	890<	960	1060
Flv Wheel Dia	mm	525	650	700	800	900<	1000	1125
Gap (Bed to Bottom)	mm	250	325	350	375	400<	450	500
Stroke per Minute	mm	60	55	50	45	40<	40	35
H. P. Required (1440)	mm	2	3	3	5	7.5<	10	15
Bore in Bed	mm	110	125	140	160	190<	220	250
Weight in Kgs (Apprx)	mm	900	1550	2050	2700	4000<	5500	7800