


Heavy Duty Cone Pulley Lathe Machine



ST-6

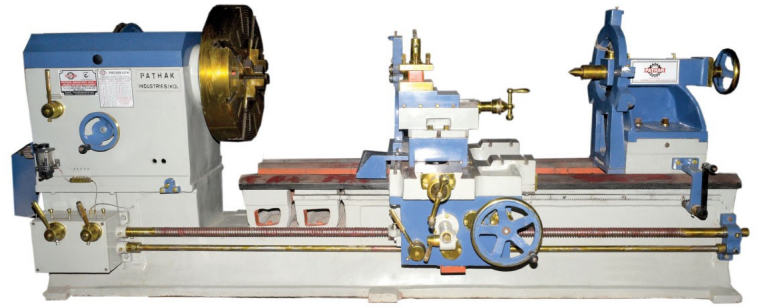

SMT-12

Standard Accessories



Face Plate (1)



Chuck Plate (1)



Set of 22 Change Gears



Stationery steady(1)



Follow Rest Assembly(1)



Dead Centers

Optional Accessories



Electric Motor & Starter



Electric Coolant Pump



Gears to cut metric threads



Tool Post grinder



4jaw independent chuck



3jaw self centering chuck



Taper turning attachment



Digital Read Out



Revolving Center



Norton Gear Box



Keyway Cutting Attachment

BED - SEASONED INVERTED 'V' BED WAYS MADE OF CLOSE GRAINED GREY CAST IRON

SPECIFICATION

Model	ST-4	ST-6	SMT-8	DK-10	SMT-12	SMT-16	SMT-20
Length of bed (With Head Stock)	4'-6"	6'-0"	8'-0"	10'-0"	12'-0"	16'-0"	20'-0"
Width of bed	12"	14"	16"	18"	20"	22"	22"
Centre From BED	10"	12"	14"	16"	8"	20"	20"
Width of Gap	5"	9"	12"	14"	19"	19"	19"
Swing Over Saddle (dia)	10"	12"	14"	16"	20"	24"	24"
Swing In gap (dia)	28"	38"	41"	47"	54"	60"	60"
Admit Between Centres	2'-3"	3'-0"	4'-6"	5'-8"	7'-6"	11'-0"	14'-0"
Hollow Spindle	1.3/4"	2.1/8"	3.1/8"	3.5/8"	4.1/8"	4.1/8"	4.1/8"
No. Of Spindle Speeds	6	6	6	6	6	6	6
Dia. Of Leadscrew	1.3/8"	1.5/8"	1.5/8"	1.5/5"	1.3/4"	1.3/4"	1.3/4"
Dia. Of Feedshaft	1"	1.1/8"	1.1/8"	1.3/8"	1.3/8"	1.3/8"	1.1/2"
Power Required	1 H.P	2 H.P	3 H.P	3 H.P	5 H.P	7.5 H.P	10 H.P
R.P.M Of Motor (Aprox.)	1440	1440	960	960	960	960	960
NETT Weight (Aprox.)	800 Kgs	1200 Kgs	1800 Kgs	2300 Kgs	2800 Kgs	4200 Kgs	5200 Kgs

* WE ALSO MANUFACTURER THE ABOVE MODELS WITH DIFFERENT BED WIDTHS AND CENTRE HEIGHT'S

